

产品介绍/◎ Brief Product

FT35-11型模压玻璃钢轴流风机


◆ 产品示意图



- 特点: 瓦式叶片、高轮毅比、低风阻电机支架,
风量大、风压高、耗电省、新型、高效、节能,
可制作成防爆及防潮型
- 应用: 厂房、仓库、办公楼、住宅、娱乐场所
等的通风、换气

◆ FT35-11模压玻璃钢轴流风机外形及安装尺寸

本厂(上海俊诺风机有限公司)生产FT35-11型模压玻璃钢轴流风机, 2.8、3.15、3.55、4、4.5、5、5.6、6.3号玻璃钢轴流风机外壳都是四柱液压机模压成型, 2.8、3.15、3.55、4、4.5、5、5.6、6.3、7.1、8、9、10、11.2、12号玻璃钢轴流风机叶轮都是四柱液压机模压成型, 7.1、8、9、10、11.2号玻璃钢轴流风机外壳还是采用玻璃钢手糊工艺。

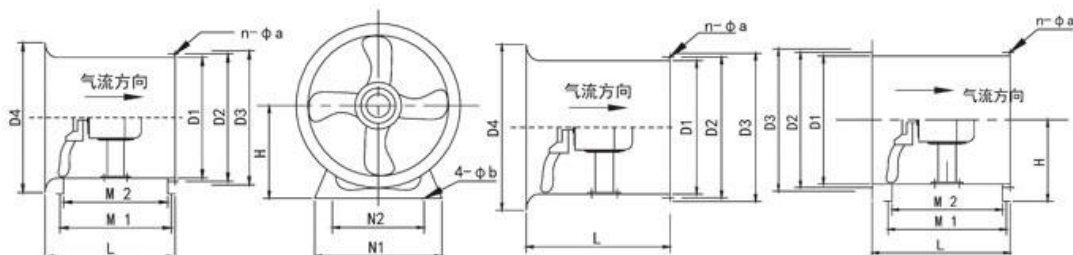

机号	D1	D2	D3	D4	L	管道式				N1	N2	n-φa	φb	H
						M1	M2	M1	M2					
2.8	φ 290	φ 322	φ 346	φ 355	258	236	200	211	175	200	150	8-φ 8.5	φ 8.5	205
2.8(防爆)					340	286	250	261	225					
3.15	φ 325	φ 358	φ 381	φ 400	280	236	200	211	175	220	170	8-φ 8.5	φ 8.5	230
3.15(防爆)					360	286	250	261	225					
3.55	φ 365	φ 398	φ 420	φ 450	327	261	225	236	200	220	170	8-φ 11	φ 8.5	250
3.55(防爆)					400	311	275	286	250					
4	φ 410	φ 448	φ 480	φ 500	350	269	225	244	200	300	240	8-φ 11	φ 11	265
4(防爆)					430	344	300	319	275					
4.5	φ 460	φ 498	φ 530	φ 560	374	344	300	294	250	300	240	12-φ 11	φ 11	295
4.5(防爆)					450	344	300	319	275					
5	φ 510	φ 553	φ 590	φ 630	414	344	300	294	250	400	320	12-φ 11	φ 13	315
5(防爆)					490	369	325	319	275					
5.6	φ 570	φ 613	φ 650	φ 710	454	369	325	319	275	400	320	12-φ 11	φ 13	365
6.3	φ 640	φ 683	φ 720	φ 800	474	377	325	327	275	500	400	16-φ 11	φ 16	395
7.1	φ 720	φ 764	φ 800	φ 900	494	437	375	387	325	600	480	16-φ 11	φ 16	435
8	φ 810	φ 859	φ 891	φ 1000	579	437	375	387	325	600	480	16-φ 13	φ 17	490
9	φ 910	φ 959	φ 1000	φ 1120	648	470	400	420	350	700	580	16-φ 13	φ 18	550
10	φ 1010	φ 1064	φ 1100	φ 1250	753	470	400	420	350	700	580	20-φ 13	φ 19	615
11.2	φ 1130	φ 1184	φ 1230	φ 1400	888	495	425	445	375	800	650	20-φ 13	φ 20	660

◆ FT35-11型模压玻璃钢轴流风机参数表

机号	转速 (rpm)	叶角 (deg)	风量 (m³/h)	风压 (Pa)	电机型号	功率 (kw)
2.8	2900	15	1224	128	YSF-5622	0.12
		20	1742	141	YSF-5632	0.18
		25	2560	143	YSF-5622	0.18
		30	2495	165	YSF-6322	0.25
		35	2778	186	YSF-6332	0.37
	1450	15	613	32	YSF-5014	0.025
		20	873	35.2	YSF-5014	0.025
		25	1133	35.7	YSF-5014	0.025
		30	1251	41.2	YSF-5024	0.04
		35	1392	46.6	YSF-5024	0.04
3.15	2900	15	1944	170.1	YSF-6312	0.18
		20	2681	186.6	YSF-6322	0.25
		25	3418	189.2	YSF-6332	0.37
		30	3753	217.7	YSF-7122	0.55
		35	4155	247	YSF-7122	0.55
	1450	15	972	42.5	YSF-5014	0.025
		20	1340	46.6	YSF-5024	0.04
		25	1709	47.2	YSF-5024	0.04
		30	1877	54.9	YSF-5614	0.06
		35	2078	61.7	YSF-5624	0.09
3.55	2900	15	2783	216.1	YSF-7112	0.37
		20	3839	237	YSF-7122	0.55
		25	4895	240.3	YSF-7132	0.75
		30	5375	279	YSF-7132	0.75
		35	5951	313.6	YSF-8022	1.1
	1450	15	1394	54	YSF-5024	0.04
		20	1923	59.2	YSF-5614	0.06
		25	2452	60.2	YSF-5624	0.09
		30	2692	69.7	YSF-5624	0.09
		35	2981	78.4	YSF-6314	0.12
4	2900	15	3980	274.3	YSF-7132	0.75
		20	5489	300.9	YSF-8022	1.1
		25	6999	305.1	YSF-8022	1.1
		30	7685	354	YT90S-2	1.5
		35	8500	398.2	YT90L-2	2.2
	1450	15	1993	68.6	YSF-5624	0.09
		20	2749	75.2	YSF-6314	0.12
		25	3505	76.2	YSF-6324	0.18
		30	3849	88.5	YSF-6324	0.18
		35	4261	99.5	YSF-7114	0.25
4.5	1450	15	2838	86.8	YSF-6314	0.12
		20	3914	95.2	YSF-6324	0.18
		25	4991	96.5	YSF-7114	0.25
		30	5480	112	YSF-7124	0.37
		35	6067	126	YSF-7124	0.37
5	1450	15	4289	112.6	YSF-7114	0.25
		20	5763	124.8	YSF-7124	0.37
		25	7273	129.6	YSF-8014	0.55
		30	7907	145.6	YSF-8014	0.55
		35	8712	164.6	YSF-8024	0.75
	960	15	2839	49.1	YSF-8026	0.37
		20	3815	54.4	YSF-8026	0.37
		25	4792	56.8	YSF-8026	0.37
		30	5235	63.5	YSF-8026	0.37
		35	5768	71.8	YSF-8026	0.37

机号	转速 (rpm)	叶角 (deg)	风量 (m³/h)	风压 (Pa)	电机型号	功率 (kw)
5.6	1450	15	6025	140.9	YSF-7124	0.37
		20	8097	156.1	YSF-8014	0.55
		25	10168	162.6	YSF-8024	0.75
		30	11110	182.1	YT90S-4	1.1
		35	12239	206	YT90S-4	1.1
	960	15	3989	61.8	YSF-8026	0.37
		20	5361	68.4	YSF-8026	0.37
		25	6732	71.3	YSF-8026	0.37
		30	7355	79.8	YSF-8026	0.37
		35	8103	90.3	YSF-8026	0.37
6.3	1450	15	8579	178.3	YSF-8024	0.75
		20	11528	197.6	YT90S-4	1.1
		25	14477	205.8	YT90L-4	1.5
		30	15817	230.5	YT90L-4	1.5
		35	17426	260.7	YT100L-4	2.2
	960	15	5680	78.2	YSF-8026	0.37
		20	7632	86.6	YSF-8026	0.37
		25	9585	90.2	YSF-8026	0.37
		30	10472	101	YT90S-6	0.75
		35	11534	114.3	YT90S-6	0.75
7.1	1450	15	12280	226.5	YT90L-4	1.5
		20	16501	250.9	YT100L1-4	2.2
		25	20722	261.4	YT100L2-4	3
		30	22641	292.7	YT100L2-4	3
		35	24944	331.1	YT112M-4	4
	960	15	8130	99.3	YT90S-6	0.75
		20	10925	110	YT90S-6	0.75
		25	17320	114.6	YT90S-6	0.75
		30	14990	128.4	YT90L-6	1.1
		35	16514	145.2	YT90L-6	1.1
8	1450	15	17567	287.6	YT100L2-4	3
		20	23605	318.6	YT112M-4	4
		25	29644	331.8	YT132S-4	5.5
		30	32389	371.6	YT132S-4	5.5
		35	35682	420.2	YT132M-4	7.5
	960	15	11630	126.1	YT90S-6	0.75
		20	15628	139.6	YT90L-6	1.1
		25	19626	131.1	YT90L-6	1.1
		30	21444	162.9	YT100L-6	1.5
		35	23624	184.2	YT112M-6	2.2
9	960	15	16560	159.5	YT100L-6	1.5
		20	22252	176.7	YT112M-6	2.2
		25	27944	184.1	YT112M-6	2.2
		30	30532	206.2	YT132S-6	3
		35	33937	233.2	YT132M1-6	4
10	960	15	22716	197	YT112M1-6	2.2
		20	30524	218.2	YT132S-6	3
		25	38333	227.3	YT132M1-6	4
		30	41882	254.5	YT160M-6	7.5
		35	46141	287.9	YT160M-6	7.5
11.2	960	15	31914	247	YT132M1-6	4
		20	42884	273.7	YT132M2-6	5.5
		25	53855	285.1	YT160M-6	7.5
		30	58841	319.3	YT160L-6	11
		35	64825	361.1	YT160L-6	11